

COVERKING®

Defining Custom Accessories

Owner's Manual

Model #DG1214, DG1215, DG1216, DG1217, DG1218, DG1219
Dodge Challenger


About Your Coverking® Product

Congratulations on your purchasing decision. Coverking® designed this Front End Cover to be the very best available. With proper care, your Coverking® Front End Cover will provide years of stylish looks and maximum protection.

Installation of the Front End Cover is a simple process that should take about 30 minutes. Removal and reinstallation (as for car washing) takes just a few minutes.

If you encounter any problems during the installation of your Coverking® Front End Cover, please contact our Consumer Response Department, Monday - Friday, 7AM - 5PM (PST) at 1-800-400-1120.

Note: Please read this manual thoroughly before beginning the installation. After completing installation, keep this manual for further reference.

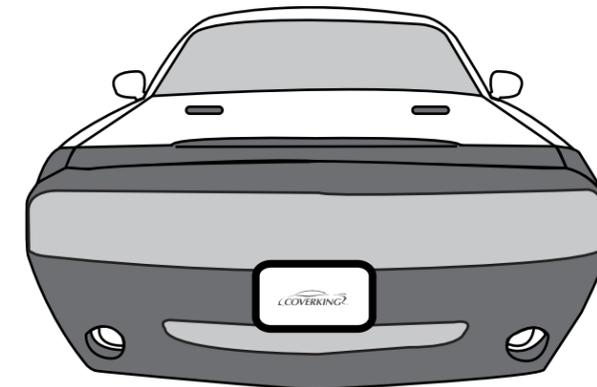

Tips for Easier Installation and Care

- Before Installation, wash and wax your vehicle. Use a paste wax—not a spray—on the hood and fenders in order to maintain the finish underneath the Coverking® Front End Cover.
- Install the Front End Cover in temperatures of 70°F (21°C) or higher. The warmth will make the fabric more pliable and will allow it to stretch slightly for a tighter and smoother fit.
- Do not use vinyl cleaners or protectants on your Coverking® Front End Cover. These cleaners reduce the breathability of the vinyl and will void the Coverking® Warranty.
- Do not install the Coverking® Front End Cover on any vehicle that does not still have its original factory paint. Coverking® will not be held liable for any warranty claims of paint damage to repainted vehicles.
- Remember that the Front End Cover also protects paint from fading due to sunlight while the rest of the car is exposed. Coverking® will not be held liable for any warranty claims on sun-faded paint.
- **Caution:** There may be elastic straps described in some sections of this manual that can snap back if not properly hooked. To avoid injuries, exercise caution and use safety glasses when installing.
- **DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER.** When removing the cover, it will be easiest to reverse the installation steps.

Contents	
Parts List	Pg. 2
Installation Instructions	
Hood Cover	Pg. 2
Front End Cover	Pg. 2

Unpacking: What You Have

Remove all parts from the shipping container. Check each part included against the following Parts List and look for any possible damage from shipping.

Parts List

Item	Description	Qty
1	Cover, hood	1
2	Cover, front end	1
3	Warranty Card	1

The right side of the fabric is indicated as: 

The Hood Cover

One of the features that makes your Coverking® Front End Cover the very best available is the separate Hood Cover. This means that you can access the engine compartment without removing or adjusting the cover. Install the Hood Cover first, by following these steps:

Step One

Open the hood and slip the Hood Cover over the front edge of the hood. Make sure that the corners of the hood fit snugly into the corners of the Hood Cover. When the Hood Cover fits snugly, stretch the fabric at the straps to remove major wrinkles.

Step Two

Pull one of the straps sewn to the Hood Cover to the hole in the hood's underside, as shown in Figure 1. Adjust the Buckle Hook so that it is about 1/2" away from the hole. Now pull the strap down and slip the Buckle Hook into the hole. To release the tension on the webbing for adjustment of the strap, simply pull out on the tab on the Buckle Hook (see Figure 2).

The Strap should be quite taut (as taut as possible without tearing). Relocate the Buckle Hook if necessary to tighten. Tie off excess strap to keep free of the engine compartment. Now repeat this process with the strap on the other side.

Note: Check all straps periodically to insure tension. Adjust tightness if necessary.

Figure 1


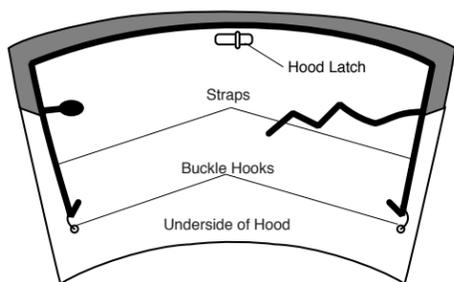



Figure 2

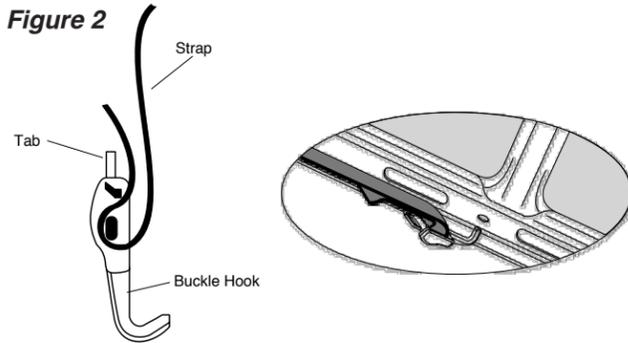

Step Three

With the Hood Cover in place, pull the fabric on the sides of the hood around to the underside of the hood on both sides. This will insure maximum tightness of the Hood Cover (see Figure 3).

Figure 3

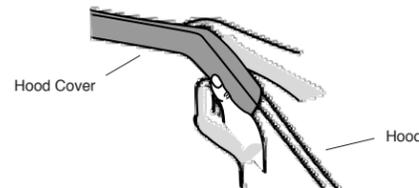

Step Four

The remaining strap provides better tension and stability for the cover. Stretch the strap across the underside of the hood and thread it through the buckle on the opposite side (see Figure 4). Do not twist the strap. Pull the strap as tight as possible. Loop the excess strap back through the buckle to keep it out of the engine compartment (see Figure 4b). Again, make sure that the strap is taut.

Figure 4

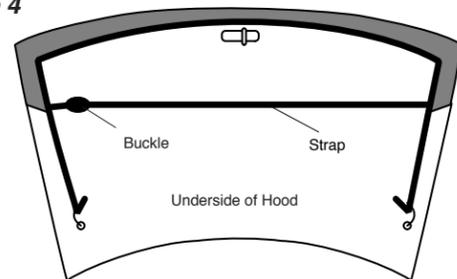


Figure 4a

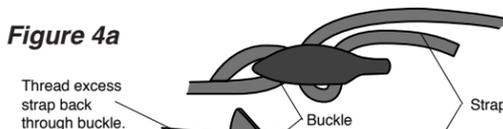


Figure 4b

The Front End Cover

This section explains how to install the front cover portion of your Coverking® Front End Cover.

Step One


Orient the cover on the vehicle. The bottom of the cover will be marked on the inside. If necessary, slip the opening in the cover around the license plate.

Note: Turn the wheels for easier access to the wheel wells.

Step Two

Pull the cover back to one of the wheel wells and locate the two plastic clips sewn to the cover (see Figure 5). Hook the clips to the edge of the wheel well. Attach the cover to the other wheel well.


Figure 5

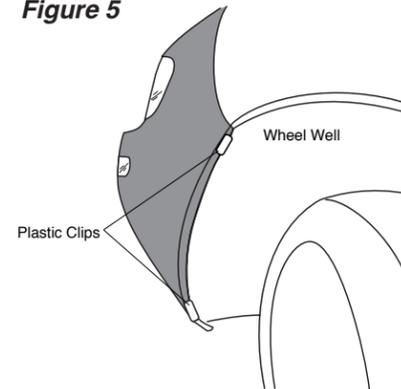

Step Three

Locate the two straps with plastic clips sewn to the cover along the bottom of the fender, in front of the wheel well (see Figure 6). Hook them to the bottom of the fender.


Figure 6

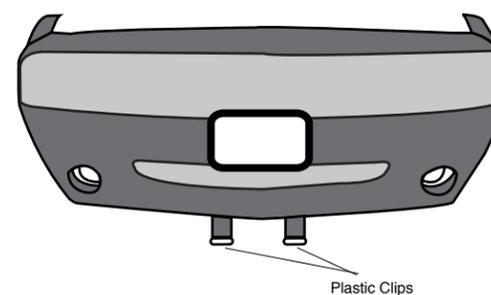

Step Four

Pull up on the Grille Screen and locate the ten plastic clips sewn to the top of the cover along the edge of the engine compartment (see Figure 7). Hook them to the edge of the engine compartment.


Figure 7

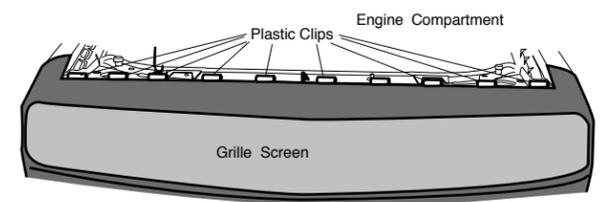

Step Five

Pull up on the sides of the cover and locate the strap with the buckle hook sewn to the cover on each side of the engine compartment (see Figure 8). Pull the strap down and slip the buckle hook into the hole.

Figure 8

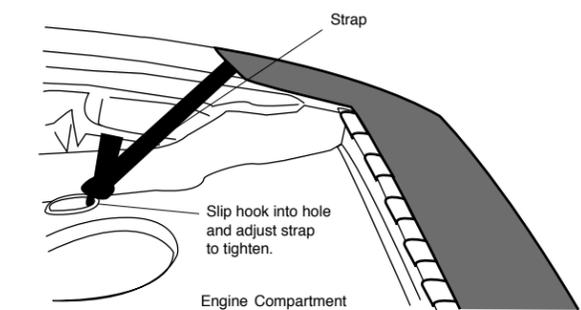

Note: Check all straps periodically to insure tension. Adjust tightness if necessary.

Note: DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER. When removing the cover, it will be easiest to reverse the installation steps.