



**Owner's Manual**  
Model #CH1146 Chevy HHR


**About Your Coverking® Product**

Congratulations on your purchasing decision. Coverking® designed this Front End Cover to be the very best available. With proper care, your Coverking® Front End Cover will provide years of stylish looks and maximum protection.

Installation of the Front End Cover is a simple process that should take about 30 minutes. Removal and reinstallation (as for car washing) takes just a few minutes.

If you encounter any problems during the installation of your Coverking® Front End Cover, please contact our Consumer Response Department, Monday - Friday, 7AM - 5PM (PST) at 1-800-400-1120.

**Note:** Please read this manual thoroughly before beginning the installation. After completing installation, keep this manual for further reference.

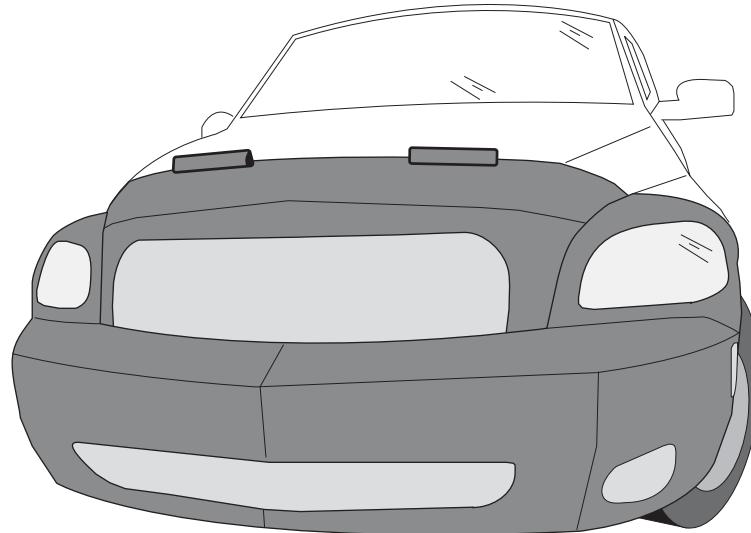

**Tips for Easier Installation and Care**

- Before Installation, wash and wax your vehicle. Use a paste wax—not a spray—on the hood and fenders in order to maintain the finish underneath the Coverking® Front End Cover.
- Install the Front End Cover in temperatures of 70°F (21°C) or higher. The warmth will make the fabric more pliable and will allow it to stretch slightly for a tighter and smoother fit.
- Do not use vinyl cleaners or protectants on your Coverking® Front End Cover. These cleaners reduce the breathability of the vinyl and will void the Coverking® Warranty.
- Do not install the Coverking® Front End Cover on any vehicle that does not still have its original factory paint. Coverking® will not be held liable for any warranty claims of paint damage to repainted vehicles.
- Remember that the Front End Cover also protects paint from fading due to sunlight while the rest of the car is exposed. Coverking® will not be held liable for any warranty claims on sun-faded paint.
- **Caution:** There may be elastic straps described in some sections of this manual that can snap back if not properly hooked. To avoid injuries, exercise caution and use safety glasses when installing.
- **DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER.** When removing the cover, it will be easiest to reverse the installation steps.

## Contents

Parts List	Pg. 2
Installation Instructions	
Hood Cover	Pg. 2
Front End Cover	Pg. 2

## Unpacking: What You Have

Remove all parts from the shipping container. Check each part included against the following Parts List and look for any possible damage from shipping.

## Parts List

Item	Description	Qty
1	Cover, hood	1
2	Cover, front end	1
3	Warranty	1

The right side of the fabric is indicated as:



## The Hood Cover

One of the features that makes your Coverking® Front End Cover the very best available is the separate Hood Cover. This means that you can access the engine compartment without removing or adjusting the cover. Install the Hood Cover first, by following these steps:

### Step One

Open the hood and slip the Hood Cover over the front edge of the hood. Make sure that the corners of the hood fit snugly into the corners of the Hood Cover. When the Hood Cover fits snugly, stretch the fabric at straps to remove major wrinkles.



### Step Two

Pull one of the straps sewn to the Hood Cover to the hole in the hood's underside, as shown in Figure 1. Adjust the Buckle Hook so that it is about 1/2" away from the hole. Now pull the strap down and slip the Buckle Hook into the hole. To release the tension on the webbing for adjustment of the strap, simply pull out on the tab on the Buckle Hook (see Figure 2).

The Strap should be quite taut (as taut as possible without tearing). Relocate the Buckle Hook if necessary to tighten. Tie off excess strap to keep free of the engine compartment. Repeat this process for the other side.


*Note: Check all straps periodically to insure tension. Adjust tightness if necessary.*

### Figure 1

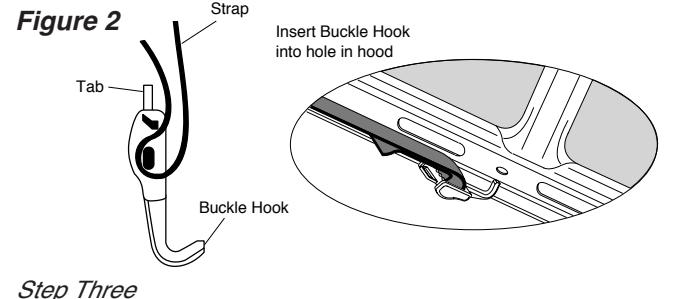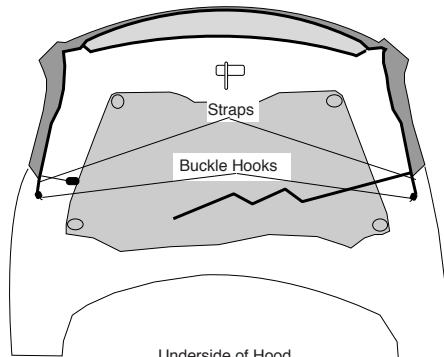





### Step Three

With the Hood Cover in place, pull the fabric on the sides of the hood around to the underside of the hood on both sides. This will insure maximum tightness of the Hood Cover (see Figure 3).

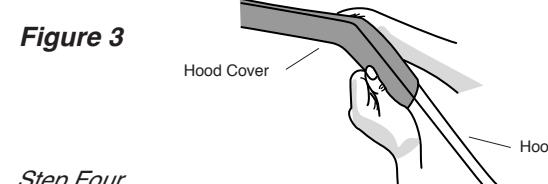

### Step Four

The remaining strap provides better tension and stability for the cover. Stretch the remaining strap across the underside of the hood and thread it through the buckle on the opposite side (see Figure 4a). Do not twist the strap. Pull the strap to remove slack, DO NOT OVERTIGHTEN. Loop the excess strap back through the buckle to keep it out of the engine compartment (see Figure 4b). Again, make sure the strap is taut.

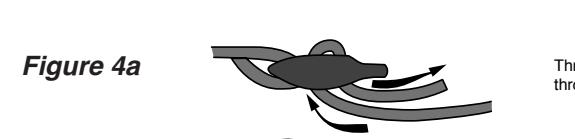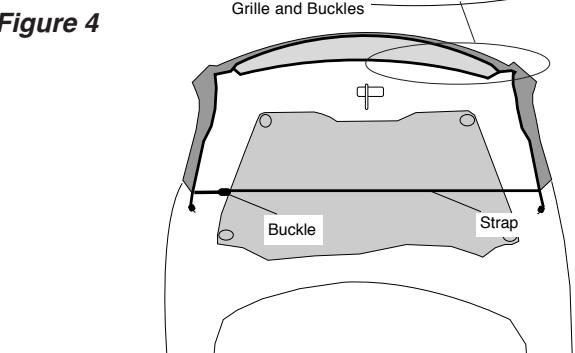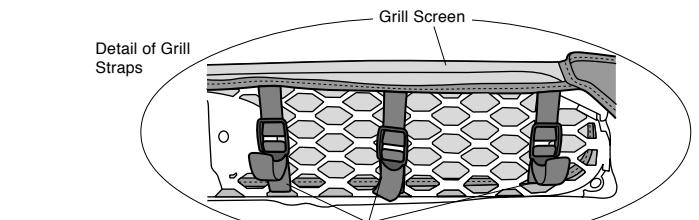

### Step Five

Locate the six web straps sewn to the inside of the grille screen (see Figure 4 detail). Thread the straps through the grille and then through the buckles behind the grille. Tighten the straps.

## Installing the Front End Cover

This section explains how to install the front cover portion of your Coverking® Front End Cover.

### Step One


Orient the cover on the vehicle. The bottom of the cover will be stamped on the inside. If necessary, slip the opening in the cover around the license plate bracket.

**Note:** Turn the wheels for easier access to the wheel wells.

### Step Two


Pull the cover back to one of the wheel wells and locate the plastic clip sewn to the cover in the top of the wheel well. Hook the clip to the edge of the fender. Then locate the (2) keyhole clips and slip them behind the rivets. Pull the cover around the front of the vehicle and attach it to the opposite wheel well.

### Figure 5

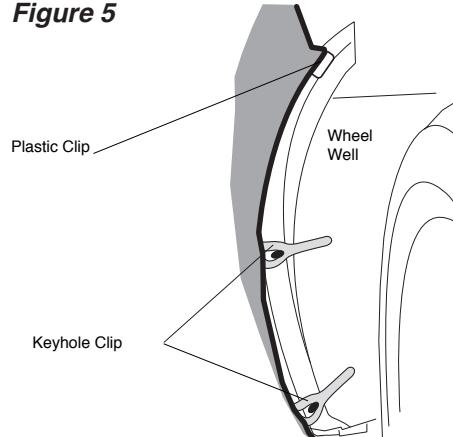

### Step Three


Pull the cover up over the bumper and locate the three (3) plastic strips sewn to the cover above each headlight opening (see Figure 6). Slip the strips in between the headlights and the fender.

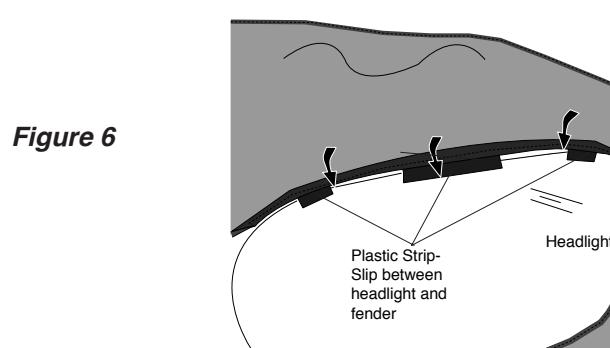

### Step Four

Pull the cover up over the front of the vehicle and locate the plastic clips sewn to the top of the cover (see Figure 7). Hook the clips to the back of the bumper.


### Figure 7

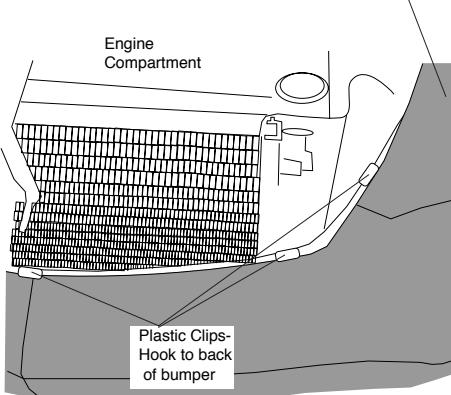

### Step Five

Locate the six plastic strips sewn across the bottom of the cover, four across the front and one under each fender (see Figure 8). Hook the plastic clips to the ledge under the vehicle.


### Figure 8

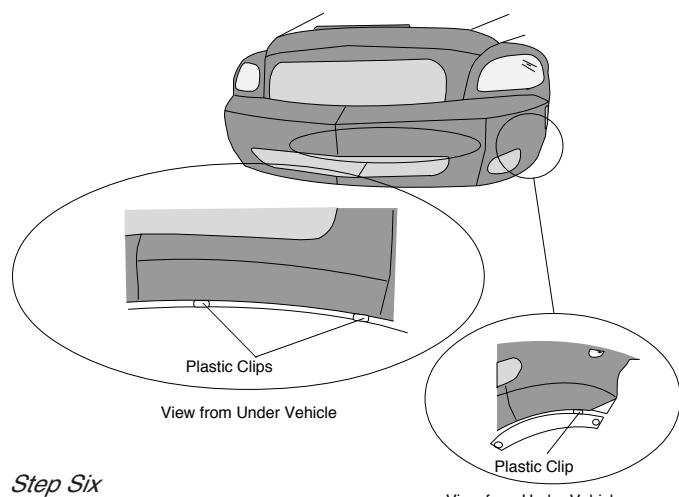

### Step Six

Pull the sides of the cover up over the fender and locate the plastic clip sewn to the cover on each side of the engine compartment (see Figure 9). Hook the clips to the ledge on each side of the engine compartment.

### Figure 9

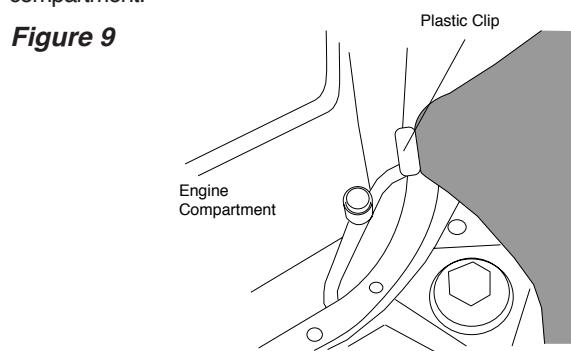

**Note: DO NOT PULL UP ON THE CLIPS OR THE FABRIC TO REMOVE THE COVER. When removing the cover, it will be easiest to reverse the installation steps.**